

WAYNE

PRODUCTS, INC.

MAXI-Skimmer SSP2 Wide Belt Series



Model SSP/2 mounted on Adjustable Stand (#30823). Stand allows height adjustment from 1 ft.-5 ft. so collected oil can be discharged in a drum or pail.




A Timer, Ground-Fault Interrupter and Outlet Extension Hose are furnished with standard SSP MAXI-Skimmers™.



Optional gravity-OIL WATER SEPARATOR for all SSP MAXI-Skimmers.

The "Affordable & Unusually Adaptable" Belt Oil Skimmer! The SSP/2 Series is a modern design made to address the ever increasing needs for WASTEWATER APPLICATIONS. It is priced to be affordable, is lightweight, portable and corrosion-proof! Polyurethane or stainless steel belts can reach from a few inches to 20 feet down. The SSP/2 accepts 1", 2" & 4" wide belts. A timer, ground-fault interrupter, 3 ft. extension hose and handle are included with standard products. Custom units with a "steep trough" side discharge for heavy oils are available as are units for 2" and larger monitor wells.

- COSTS LESS than comparable competitive units who do not include accessories!
- Accepts BELTS 1" to 4" wide reaching to 20 FEET LONG!
- COLLECTS 1 - 10 gallons per hour depending on belt width!
- AUTOMATIC OPERATION with timer (included)!
- LIFTING HANDLE provided - Only 15 pounds average weight!
- All metal parts are STAINLESS STEEL - Corrosion-proof!
- Polyurethane belt standard - Stainless steel optional!
- Serial number traceable

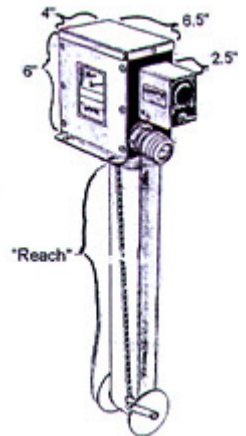

Price Includes-

TIMER: Three on-off settings. Plug-in.

GFI: On-Off buttons. Plug-In type.

HANDLE: Mounted on top lid.

HOSE: 3 feet long - for oil outlet.

Optional Modifications

POWER: 220 vac, 12 or 24 vdc, other.-

BELT: Stainless Steel.

OUTLET: Steep slope for viscous and/or sticky oils.

Optional Accessories

ADJUSTABLE STANDS: Raises skimmer 1 - 5 ft. above ground for drum collection.

SEPARATOR: Returns any host fluid and provides 100% oil.

Technical

MOTOR: 115/1/60, 30 rpm, permanent magnet type, cont. duty with stainless steel sheath cover & 6 ft. cordset. .065 amps.

FRAME: Stainless steel metal, UHMW polymer ends/scrapper blade.-

PULLEY: Nylon drive pulley. SS/nylon tail pulley with SS retainer chain.

TEMP.: 120 F. with poly belt, 200 F. with stainless steel belt.

WEIGHT: Ship weight varies from 15 - 30 lbs. depending on belt.

The upper drive portion of the SSP/2 Series measures only 8 1/2" high (with handle) x 5 1/2" wide x 9" long. Belt "reach" is distance from the base of the drive frame to the lowest belt point.

Reach in Ft	2" Belt (2.5 gph*)	4" Belt (5.5 gph*)
1	30701	30721
2	30702	30722
3	30703	30723
4	30704	30724
5	30705	30725
6	30706	30726
7	30707	30727
8	30708	30728
9	30709	30729
10	30710	30730

* Collection rates are approximate per our lab tests. Allow a decrease in collection rate for every 10 ft. reach, due to gravity. Please call for 10 gph information.

Wayne Products, Inc.

20 N. Bacton Hill Road, Malvern, PA USA • P.O. Box 788, Frazer, PA USA
Ph. 800-255-5665 • Fax 800-252-0948 • International Fax 610-251-0218