

WAYNE

PRODUCTS, INC.

MAXI-Skimmer SSV5 Variable Collection Rate 1-20 GPH

World's Only Adjustable Collection Rate Belt Oil Skimmer!

Use in applications where desired oil collection rate is not known, where incoming oil rate may change, or where oil is needed to be removed faster/slower at different times. The SSV/5 usually costs less than others on the market above 5 gph rate!

- Simply Turn Knob to Adjust Oil Lift Rate!
- Polyurethane (std) or Stainless Steel Belt.
- Belt Can Reach as Far Down as 50 Feet!
- Small Footprint - Only 8.5" high x 5" wide
- Affordable Cost! x 13" long (w/motor)

Features!

- 115 Volt Electric Plug-In!
- Totally Corrosion Proof - Made of Stainless Steel and Various Polymers (Motor Excepted)
- 4" Wide Belt Standard - 1", 2", & 3" Avail.
- Timer, Ground Fault Interrupter and Outlet Hose included.
- A Handle for Portability.
- One Year Warranty against mfg. Defects.

Price Includes-

TIMER: Three on-off settings. Plug-in.-

GFI: On-Off buttons. Plug-In type.

HANDLE: Mounted on top lid.

HOSE: 3 feet long - for oil outlet.

Optional Modifications

BELT: Stainless Steel.

OUTLET: Steep slope for viscous and/or sticky oils.

Optional Accessories

ADJUSTABLE STANDS: Raises skimmer 1 - 5 ft. above ground for drum collection.

SEPARATOR: Returns any host fluid and provides 100% oil.-

Technical

CONTROL: 115/1/60 with cordset, converts to 90 vdc




MOTOR: 90 vdc, 0-102 rpm

FRAME: Stainless steel metal, UHMW polymer ends/scrapper blade.

PULLEY: Nylon drive pulley. SS/nylon tail pulley with SS retainer chain.

TEMP.: 120 F. with poly belt, 200 F. with stainless steel belt.

WEIGHT: Ship weight varies from 25 - 60 lbs. depending on belt.

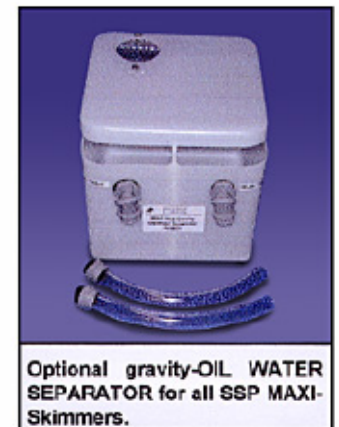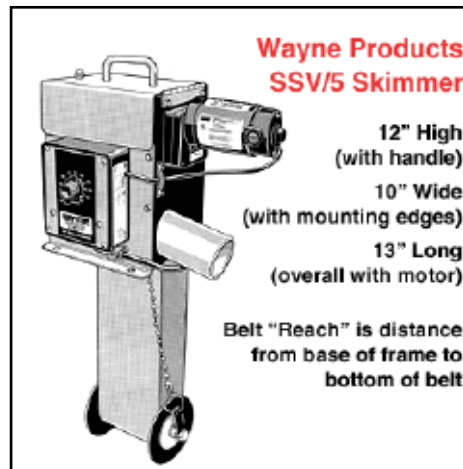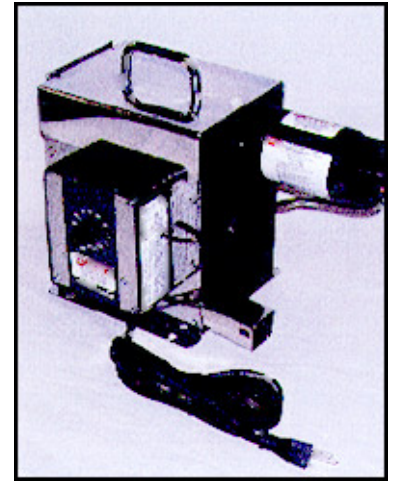

See next page
for order
numbers

Wayne Products, Inc.

20 N. Bacton Hill Road, Malvern, PA USA • P.O. Box 788, Frazer, PA USA
Ph. 800-255-5665 • Fax 800-252-0948 • International Fax 610-251-0218

SSV/5 Maxi-Skimmers™ with 1 Polyurethane Belt

Belt Reach	Order #
1 feet	30950
2 feet	30951
3 feet	30952
4 feet	30953
5 feet	30954
6 feet	30955
7 feet	30956
8 feet	30957
9 feet	30958
10 feet	30959
11 feet	30960
12 feet	30961
13 feet	30962
14 feet	30963
15 feet	30964
16 feet	30965
17 feet	30966
18 feet	30967
19 feet	30968
20 feet	30969

* Collection rates are approximate per our lab tests. Deduct a 5% collection rate for every 5 *ft.*, due to gravity. If planning to use a stand with drum for collection, add drum height plus 1 ft. to belt reach from ground level.

Contact factory for details on 2 belt units.